


INSTRUCTION MANUAL

3 Gangs Zigbee Switch Module

QS-Zigbee-S09-3C-LN




RoHS




TECHNICAL SPECIFICATIONS

Product type	3 Gang Zigbee Switch Module
Voltage	100-240VAC
Max. load	3x150W for LED Lamp 3x1150W for incandescent Lamp
Frequency	2.4GHz-2.484GHz
Operation temp.	-10°C - +40°C
Case temp.	Tc: +80°C (Max.)
Operation rang	≤ 200 m
Dims (WxDxH)	45.5x41x17.5mm(without clip)
IP rating	IP20
Warranty	2 years



Global International Operation Whenever & Wherever You are, All-in-one Mobile App

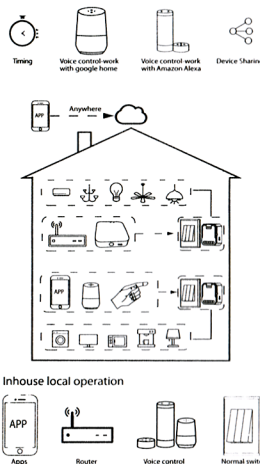

MANUAL OVERRIDE

The switch module terminal reserves the access of manual override function for the end-user to switch on/off

- Switch on/off for permanent on/off function.

Notes:


- Both the adjustment on App and switch can overwrite each other, the last adjustment remains in memory
- The App control is synchronized remains the manual switch.

INSTALLATION


▲Warnings:

- Installation must be carried out by a qualified electrician in accordance with local regulations.
- Keep the device out of reach of children.
- Keep the device away from water, damp or hot environment.
- Install the device away from strong signal sources such as microwave oven that may cause signal interruption resulted to abnormal operation of the device.
- Obstruction by concrete wall or metallic materials may reduce the effective operation range of the device and should be avoided.
- Do NOT attempt to disassemble, repair or modify the device.


1. Used to the normal switch



2. Used to the socket.



3. Used to the lamp



Wiring Instructions and Diagrams

- Turn off the power supply before carrying out any electrical installation work.
- Connect wires according to the wiring diagram.
- Insert the module into the junction box.
- Connect the power supply and follow switch module configuration instructions.

Notes: Take your smartphone close to the switch module when you're configuring.

FAQ

Q1 What should I do if I can't configure the switch module?

- Please check whether device is powered on.
- Make sure your mobile and switch module are under the same 2.4 GHz WIFI network.
- Whether it's in good internet conditions.
- Make sure the password entered in App is correct.
- Make sure the wiring is correct.

Q2 Which products can I control with the device?

All types of lights in accordance with the device specification.

Q3 What happens if the WIFI goes off?

You can still control the device connected the switch module with your traditional switch and once WIFI is active again the device connected to module will connect automatically to your WIFI network.

Q4 What should I do if I change the WIFI network or change the password?

You can connect the module to the WIFI network according to the App User Manual.

Q5 How do I reset the device?

- Long press the reset key for about 10 seconds until the indicator light flash quickly
- Turn on/off the physical switch for 5 times until the indicator light flash quickly
- Power on/off the device 5 times until the indicator light flash quickly


APP USER MANUAL



IOS APP / Android APP



Scan the QR code to download Tuya Smart App, or you can also search keyword "Tuya Smart" at App Store or Googleplay to download App.




Log in or register your account with your mobile number or e-mail address. Type in the verification code sent to your mobile or mail box, then set your login password. Click "Create Family" to enter into the APP




Open the control panel of the ZigBee gateway on the App

Before making the reset operation, pls make sure the ZigBee Gateway is added and installed to the WIFI network. Ensure that the product is within the range of Zigbee Gateway Network




Zigbee Gateway


After the wiring of switch module is done, press the reset key for about 10 seconds or turn on/off the traditional switch for 5 times until the indicator light inside the module is flashing quickly for pairing




Click "+" (Add sub-device) to select the suitable product gateway and follow the on-screen instruction for pairing

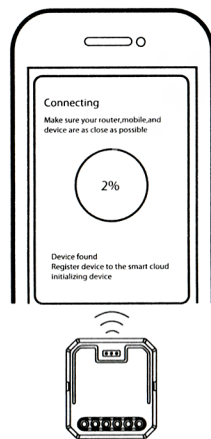

The pairing will take about 10-120 seconds to complete depending on your network condition.



When pairing is done, the Wi-Fi switch will be shown on the App



Finally, you can control the device via your mobile phone

SYSTEM REQUIREMENTS

- WIFI Router
- ZigBee gateway
- iPhone, iPad (iOS 7.0 or higher)
- Android 4.0 or higher

